

**Product Data Sheet**  
**(Page 1 of 2)**

Pressulock is a solvent free, ultra-low V.O.C. advanced pressure sensitive adhesive.

**Used to Install:**

- Luxury Vinyl Tile (LVT)
- Vinyl Composition Tile (VCT)
- Luxury Vinyl Plank (LVP)
- Sheet Flooring
- Modular Carpet Tile
- Carpet Cushion

When Pressulock is used to install LVT, LVP, VCT and sheet flooring it provides a strong and permanent bond. When used to install carpet tiles it retains a permanent tack, allowing the tiles to be lifted and replaced with minimal adhesion loss.

**Product Features and Performance Advantages:**

- Easy Trowel or Roller Application
- Superior Tack Development
- Solvent Free, Ultra-Low VOC
- Non-Staining with Mildew and Mold Resistance

**Subfloor Preparation:**

Moisture testing must be carried out on all concrete subfloors, which must be on or above grade before installation proceeds, also all industry and manufacturers standards and recommendations must be followed. Tests can include the Calcium Chloride test ASTM F1869 with an old slab not to exceed 5 pounds per 24 hours per 1000 square feet and a green slab not to exceed 8 pounds. Alternatively, an In-Situ Relative Humidity test ASTM F2170 can be carried out with an old slab not to exceed 80% and a green slab not to exceed 90%.


**Installation Over Non-Porous Substrates:**

Apply the adhesive using the instrument of choice and let it dry (usually between 30 to 60 minutes) until there is minimal or no adhesive transfer when touched. Apply the flooring and then roll it in both directions with a 100 lbs. 3-section roller.

**Installation Over Porous Substrates:**

When installing vinyl tile or plank, apply the adhesive and let it dry to the extent that it develops enough tack to prevent the tile or plank slipping. When installing vinyl sheet, apply the adhesive and leave it for 15 minutes then apply the vinyl sheet. After the installation of the vinyl tile, plank or sheet, roll the installations in both directions with a 100 lbs. 3 section roller.

*Note:* When installing carpet tile over either non-porous or porous substrates, allow the adhesive to dry completely prior to installation. After installation, roll the carpet tile in both directions with a 100 lbs. 3-section roller.

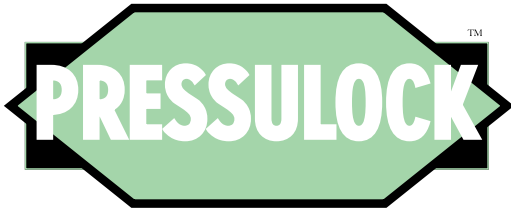

**Product Data Sheet**  
**(Page 2 of 2)**

**After Installation:**


Dried adhesive may be cleaned using a relevant solvent, whereas wet adhesive may be cleaned using a wet rag. The floor manufacturers guidelines regarding foot traffic should be followed and foot traffic should be limited for the first 24 hours following installation. Heavy foot traffic and objects like furniture should not be introduced to the installation area for 72 hours over porous substrates and 96 hours over non-porous substrates.

1/16" x 1/32" x 1/32" U-notch trowel  
Vinyl Tile & Plank  
heavy backed Carpet Tile  
(vinyl or non-vinyl)



approx. 300 sq.ft./gal.

3/8" nap roller  
Vinyl Sheet  
moderate backed Carpet Tile  
(vinyl or non-vinyl)  
Carpet Cushion



approx. 335-400 sq.ft./gal.

**Product Limitations:**

Do not use for installations over cutback (asphalt-based adhesive remains).  
Do not use on overly chemically treated areas.  
Do not freeze.  
Do not use outdoors.

**Packaging:**

Pressulock is packaged in a 4 gallon plastic pail.

**Physical and Chemical Data:**

Form: liquid, dispersion  
Odor: faint sweet odor  
Color: light green  
pH: approx. 7 - 9  
Density: 8 lbs. / gal.  
VOC: <3.4 g/l

**Warning Dialogue:**

If eye contact occurs, flush with large amounts of cool water for at least 15 minutes while holding eyelid open. If irritation persists, seek medical attention. Wash any potential skin contact areas with soap and water and if skin problems occur seek medical attention. If swallowed, seek medical attention. Keep out of the reach of children and dispose of empty / used containers responsibly. See Safety Data Sheet (SDS) for more detailed information.

**Warranty Information:**

This product is warranted to be in accordance with the technical properties outlined on this data sheet. The manufacturer is not responsible for the misuse of this product.